


REUSABLE FIBER for HOLMIUM LASER

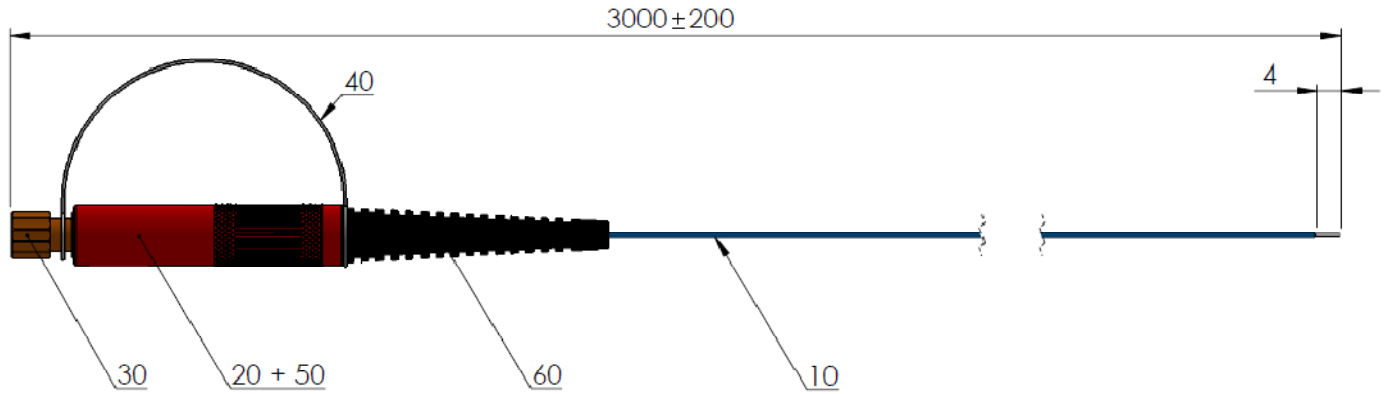

10	550µm fiber
20	Freestanding SMA905 holmium connector
30	PEEK protection cap
40	Holding flap
50	Extension sleeve red
60	Bend protection

Device features:

Length	3m±0,2m
Connector	Freestanding SMA 905 holmium connector
Distal end	Flat tip (straight emission)
Further features	10 x time reusable

Optical fiber properties:

NA	0.22± 0.02
Core	Ø 550µm ± 2% (Optional cores Ø 200, 272, 365, 400, 550, 600, 800, 1000µm)
Clad	Ø 605µm ± 2%
Buffer	Ø 780µm ± 5%
Buffer material	Tefzel, blue